

Maxwell Formosa

PRESS DUSTLESS FLOOR SYSTEM


Dimension: 18"X18"

Thickness: 2.0mm~3.0mm


Packing: 16 Pcs/Box



▲ 2101

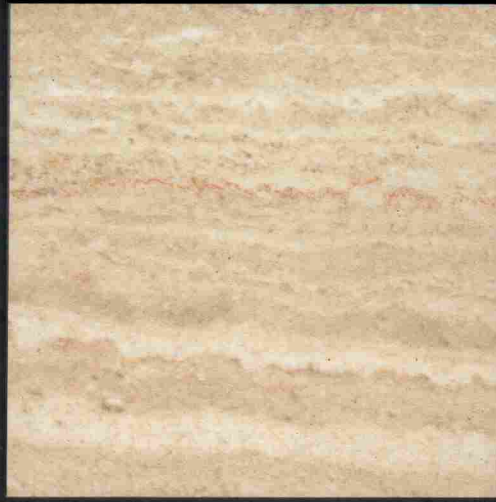

▲ 2102

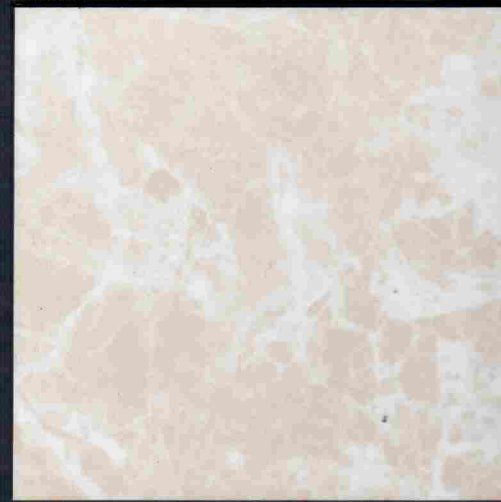


▲ 2128




▲ 2104



▲ 2105

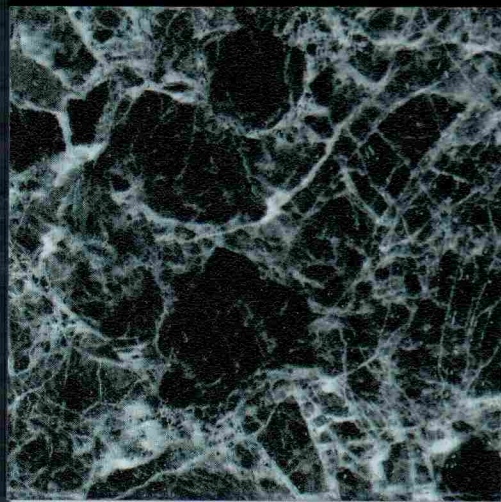


▲ 2129

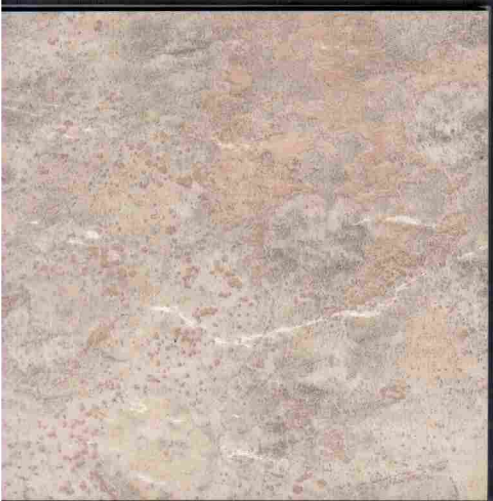

▲ 2138



▲ 2139

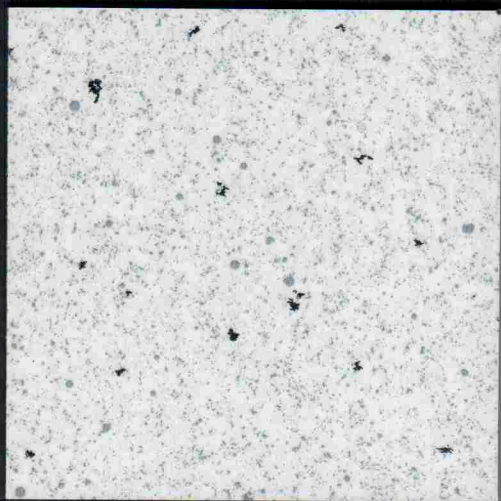

▲ 2141


Maxwell Formosa

PRESS DUSTLESS FLOOR SYSTEM


Dimension: 18"X18" Thickness: 2.0mm~3.0mm Packing: 16 Pcs/Box



▲ 2132

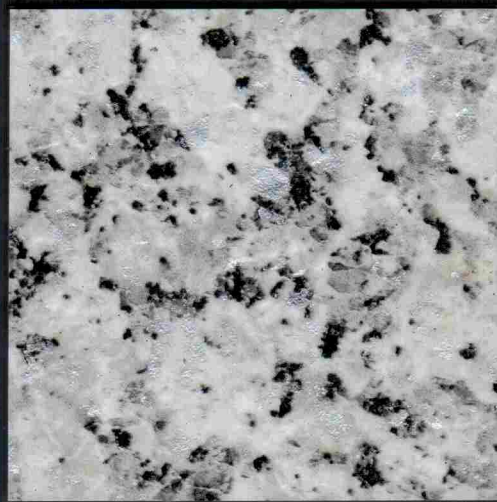

▲ 2133

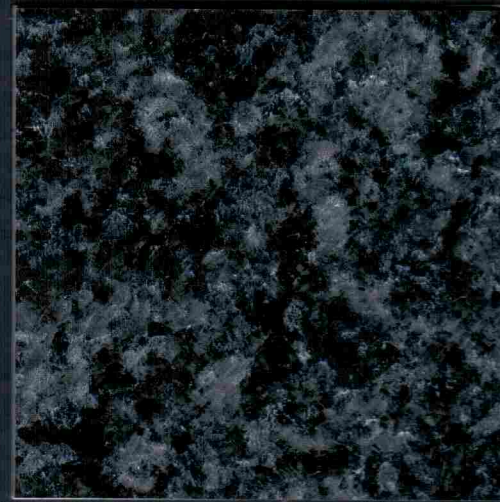


▲ 2135



▲ 2167




▲ 2169

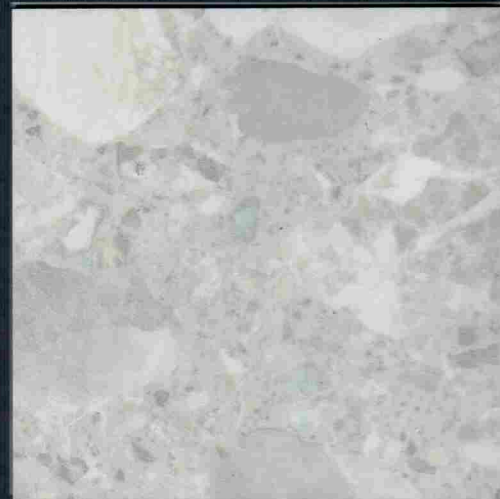


▲ 2168



▲ 2120

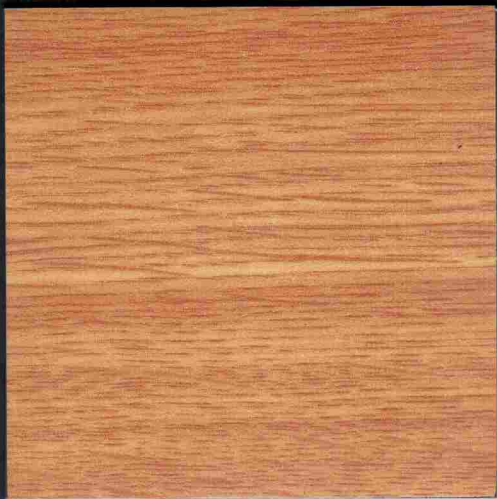

▲ 2121

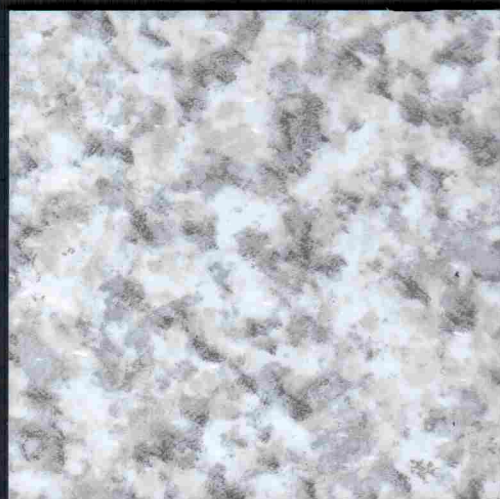

▲ 2029

Maxwell Formosa

PRESS DUSTLESS FLOOR SYSTEM

Dimension: 50cmX50cm


Thickness: 3.0mm

Packing: 20 Pcs

訂製品



▲ 5201

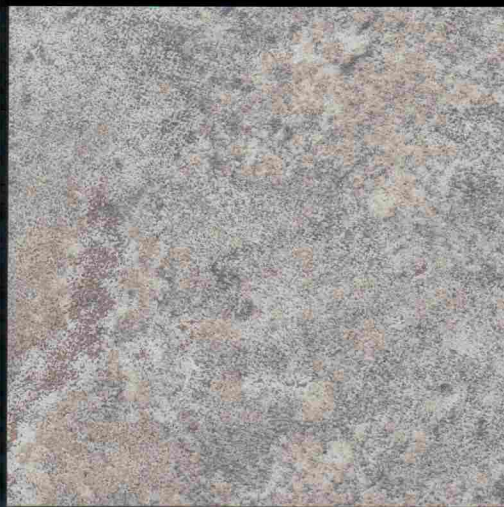

▲ 5202



▲ 5203



▲ 5204



▲ 5205




▲ 5206



▲ 5207



▲ 5208

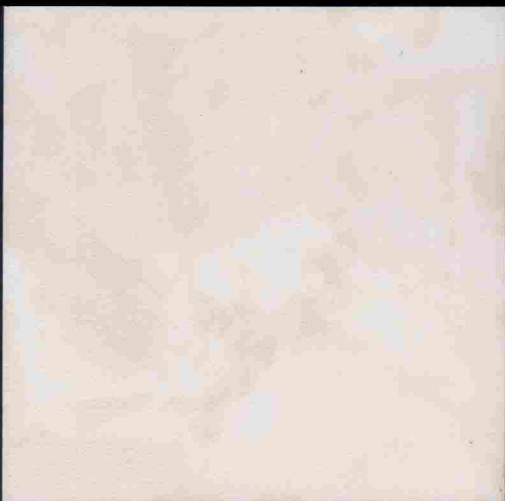

▲ 5209

Maxwell Formosa


PRESS DUSTLESS FLOOR SYSTEM

Dimension: 30cmX60cm

Thickness: ~3.0mm

Packing: 18 Pcs/Box

訂製品

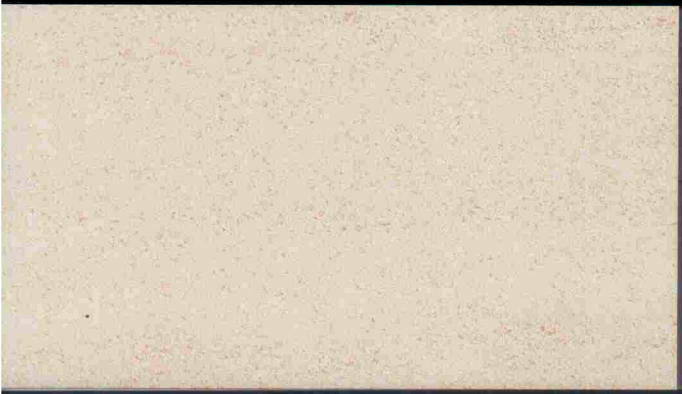

▲ 3601



▲ 3602




▲ 3603




▲ 3604



▲ 3605

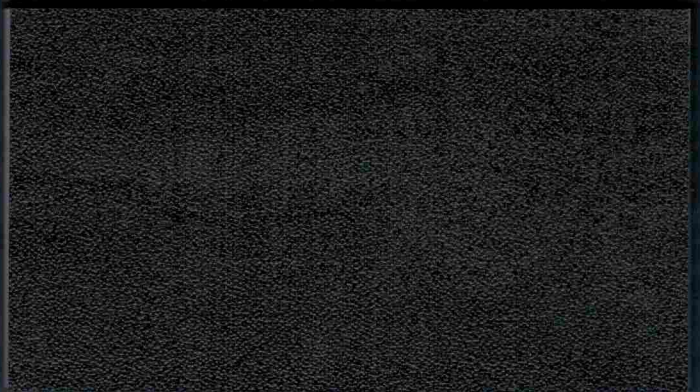

▲ 3606

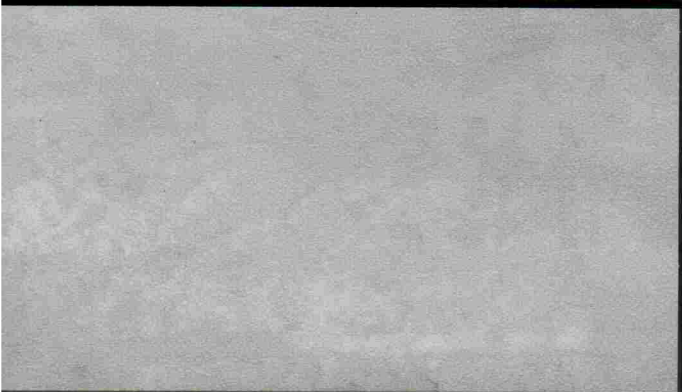

▲ 3607



▲ 3608

MAXWELL FORMOSA

COMMERCIAL FLOOR SYSTEM

TECHNICAL DATA

(技術數據)

TYPE OF FLOOR COVERING: PVC NON-ASBESTOS FLOOR TILES SEMI-RIGID 5 LAYERS
(地材種類) LAMINATED FLOOR TILE SPECIAL WEAR LAYER FOR ABRASION RESISTANCE FINISHED.

SPECIFICATION: GAUGE: 2.0~3.0MM
(規格) TILE SIZE: 60cm X 60cm . 50 X 50cm . 30 X 60cm . 18" X 18" . 24" X 36"
WEAR LAYER; THICKNESS 0.1MM-1.0MM(UNDER CUSTOMER REQUEST)

ABRASION RESISTANCE: Taber abraser
(耐磨耗性) Abrading wheel: CS-17
Load: 250g
Abrasion cycles: 1000
weight loss: 13mg

REMARK: The test was carried out with reference to CNS 3309

CHANGE IN DIMENSION AFTER HEATING:
(加熱長度變化量) MD -0.25%
CD -0.25%

CHANGE IN DIMENSION AFTER WATER IMMERSION:
(吸水長度變化量) MD 0.08 mm
CD 0.09 mm

THERMAL EXPANSION:
(熱膨脹率) $1.0 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$

INDENTATION:
(凹陷度) 20°C 0.26 mm
45°C 0.63 mm

RESIDUAL INDENTATION: 0.09 mm
(殘存凹陷度)

LOSS ON HEATING: 0.15%
(加熱減量)

FLAMMABILITY: Flame extinguished within 5 seconds
(耐燃性) after removal of test flame

COLOR FASTNESS TO LIGHT: Grade 4
(耐光性)

REMARK: The tests were carried out in accordance with CNS 8906 and CNS 8907
報告書號碼：90307011023及90306-005990



FLAME & SMOKE
(耐燃)



PERFORMANCE
(耐磨)



LIGHT
FASTNESS
(抗陽光)



ELECTRICAL
RESISTANCE
(電氣絕緣)



UNDER FLOOR
HEATING
(抗溫)



CASTER CHAIR
RESISTANCE
(耐壓)



CHEMICAL
RESISTANCE
(耐化學品)